


# Enable extended logging


Odysseus uses slf4j with logback. In odysseus\_dev there is org.slf4j.api.feature. Here are different files defined that can be used to configure logging



Default is logback.xml which will print only information, warnings and errors. A more detailed information can be get with using debug and even more with trace. The versions with .file. inside print the log output to a file that is configured here.

To change the default behaviour there are two ways:

- You can rename one of the files to logback.xml
- You can define the logback config in the product files.

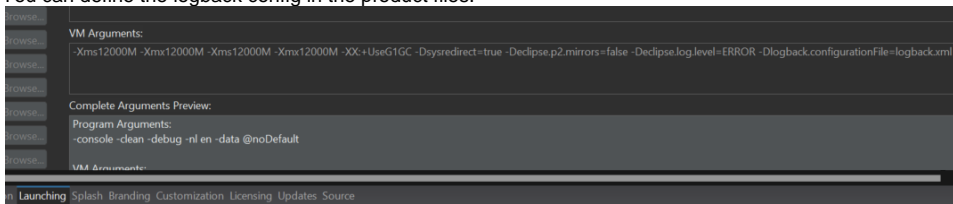

## Further Error Messages

Add the following file to your working directory of Odysseus to see further error messages. If you run inside eclipse, this file needs to be in the start folder of eclipse.

[.options](#)